

JIS 10K

IRON SWING CHECK VALVE

Bolted cover, swing type disc.

Designed to JIS B2031

Fig. 10FCO


- Bronze trim

Fig. 10FCOS

- Stainless steel trim (13 Cr.)

Fig. 10FCOU

- Stainless steel trim (18-8)

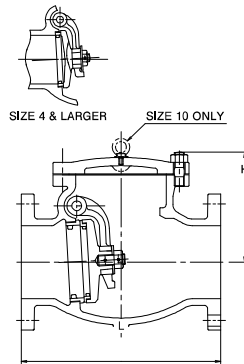

Materials

Parts	Material	JIS Spec.		
		10FCO	10FCOS	10FCOU
Body	Cast Iron	FC200		
Cover	Cast Iron	FC200		
Hinge pin	Brass/Stainless Steel	C3771BD	SUS403	SUS304
Disc	1 1/4 & 4 Bronze/Stainless Steel	CAC406	SUS403	SUS304
	5 & larger Cast Iron	FC200		
Disc seat ring	Bronze/Stainless Steel	CAC406	SUS403	SUS304
Body seat ring	Bronze	CAC406	SUS403	SUS304
Arm	Stainless Steel	SCS13A		
Gasket	Asbestos-free			
Cover bolt/nut	Carbon Steel			

For JIS Valves Pressure-Temperature Ratings MPa, refer to page 2.

Dimensions

Valve Size	B A	1 1/2*	2	2 1/2	3	4	5	6	8	10*	12*	14*
		mm										
L Face-to-face		190	200	220	240	290	360	410	500	620	700	787
H Height		106	111	121	145	165	207	225	268	315	356	381

Only 12* & 14* for 10FCOS & 10FCOU. *No JIS Mark