

NA-jointing-sheet TEADIT NA-1005

Construction:

TEADIT style NA-1005 is a compressed non-asbestos jointing-sheet material produced from Aramid fibres, bonded with Nitrile Rubber (NBR). It is being manufactured by means of a hot calender process under rigorous quality control standards which are registered under ISO 9001 certification.




Application / service:

Style NA-1005 is indicated for air, brine, water, low pressure steam, organic and weak inorganic acids, diluted and concentrated alkalis, petroleum derivatives, synthetic and vegetable oils, aliphatic and chlorinated solvents, refrigerants, gases and chemical products in general.

The P x T diagram above indicates the service limits for NA-1005 considering the simultaneous influence of pressure and temperature (chemical suitability assumed). The green area represents the normal service limits, while the orange coloured area shows the maximum application limits. For those cases, please consult our technical department.

Typical physical properties NA-1005 in ASME

ASME test	Properties	Values
F 36	Compressibility	7-17%
F 36	Recovery	45%
F 146	Weight increase	
	5h/ASTM oil/Nr.3 @ + 150°C	15%
	5h/ASTM Fuel B @ +21-29°C	15%
F 146	Thickness increase:	
	5h/ASTM oil/Nr. 3 @ +150°C	12%
	5h/ASTM Fuel B @ +21-29°C	10%
F 152	Tensile strength (transverse)	11,5 N/mm ²
DIN 52913	Residual stress	28 N/mm ²
F 38	Creep relaxation	25%
F 37 A	Sealability at 1000 psi	0,25 ml/h
-	Density	app. 1,75 g/cm ³

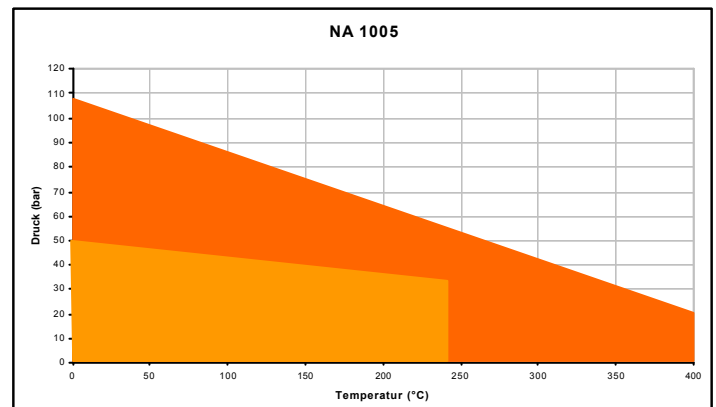

Product standard:

thickness: 0,5 / 1,0 / 1,5 / 2,0 / 2,5 and 3,0 mm
sheet size: 1.500 x 1.600 mm, 1.500 x 3.200 mm

Technical data:

Peak temperature: + 400°C
Constant temperature: + 240°C
Peak pressure: up to 110 bar
Constant working pressure: 50 bar
Colour: blue

TEADIT INTERNATIONAL PRODUKTIONS GMBH

Rosenheimer Str.10 Tel.: +43 - 5372 - 64020 - 0
A-6330 Kufstein Fax: +43 - 5372 - 64020 - 20
e-mail: mail@teadit-europe.com

TEADIT ITALIA S.p.A.

Via Vanzago 13 Tel.: +39 - 035 - 924911
I-25030 Paratico Fax: +39 - 035 - 913060
e-mail: sales@teadit.it

Since all properties, specifications and application parameters shown throughout this product information are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT does not undertake liability of any kind whatsoever.

The power of elements

