


Precision Plumbing Products "Specify with Confidence - Install with Pride"

MINI - MAX "AA" WATER HAMMER ARRESTOR








LEAD FREE



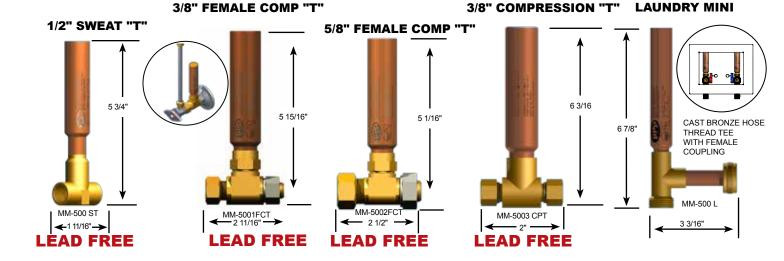

SPECIFICATIONS

MAINTENANCE: Maintenance free – the piston is the only moving part. **TEMPERATURE RANGE**: -40°F to + 212°F (-4.4°C to + 100°C) **CONSTRUCTION**: Barrel-fabricated of type "L" hard drawn copper.

Cap: Machined of free turning brass.

Piston: Polycarbonate Dow Calibre 2061-15 MFR.

Seals: "O"rings: EPDM.

Seal Lubricant: Dow-Corning Silicone Compound #111, FDA listed for use in potable water systems.

OPERATING PRESSURE: Designed to operate on all domestic and commercial systems. Normal operating pressure 35 to 125

PSIG. Max Spike pressure 250 PSIG.

LAUNDRY OR ICE MAKER WITH ARRESTORS



LEAD FREE

1/2" FEMALE SWEAT x 1/4" COMP.

MM-500 PLBFR 1/2" FEMALE SWEAT x 3/4" HOSE



1/4" COMP.

LEAD FREE

MM-500 PIMB

1/2" FEMALE SWEAT x 1/4" COMP.

MM-500 MLB

1/2" FEMALE SWEAT x 3/4" HOSE

MM-500 PLB 1/2" FEMALE SWEAT x 3/4" HOSE

PROJECT SUBMITTAL

P/N	DESCRIPTION	DIMENSIONS:
MM-500 MIMB	METAL ICE MAKER BOX	5-3/4"W x 5-1/4"H x 2-1/2"D
MM-500 MLB	METAL LAUNDRY BOX	8-1/4"W x 6"H x 3-1/2"D
MM-500 PIMB	PLASTIC ICE MAKER BOX	5-1/4"W x 5-1/4"H x 2-1/2"D
MM-500 PLB	PLASTIC LAUNDRY BOX	7-3/4"W x 6-3/4"H x 3"D
MM-500 PIMBFR	PLASTIC ICE MAKER BOX (Fire Rated)	3-7/8"W x 5-11/16"H x 2-13/16"D
MM-500 PLBFR	PLASTIC LAUNDRY BOX (Fire Rated)	8-3/16"W x 7-1/16"H x 3-5/16"D

Specify drain position when ordering laundry box assemblies.

Project: _____ Contractor: Engineer: _____ Date Submitted:_____

Patent No 3,633,627





<u> ||industries, inc.</u>

Precision Plumbing Products

Division of JL Industries, Inc.

802 SE 199th Ave Portland, Oregon 97233

T (503) 256-4010 F (503) 253-8165 www.pppinc.net









Prepared By:





Rev 08/16